

# CLARITY™ 365 SERIES

HIGHEST QUALITY  
LONGEST RUNNING  
MOST CONVENIENT

COMPLIANT LED UV-A FLASHLIGHT  
IN THE WORLD!

✓ **9 HOURS RUN TIME!** vs. 2-3 hours from other lamps

✓ **WIRELESS INDUCTION CHARGING\*** vs. other lamps with offboard and dust ingress  
\*Lithium Ion model only

✓ **OUTPUT REGULATOR** vs. lamps that can fall out of compliance



**INDUCTION CHARGER\***  
Stands on table, lamp is charged wirelessly  
\*Lithium Ion model only

**ALSO AVAILABLE IN ALKALINE BATTERY MODELS**  
SEE BACK FOR PART NUMBERS AND DETAILS

## WHY CLARITY™?

**LONGEST BATTERY LIFE ON THE MARKET**

**AUTO SHUT-OFF**  
Keeps Intensity Above Minimum Output

**WATER-PROOF, DUST-PROOF**  
**IP68 RATED**

**WIRELESS CHARGER\***  
Induction Charger Kit Included  
\*Lithium Ion model only




## CLARITY Spray Mount Accessory # RP-SM-01

Specially crafted lamp attachment permits lamp and spray can to be mounted together for convenient, single-handed fluorescent yoke inspection.

**SPRAY & INSPECT IN ONE SIMPLE STEP!**

# CLARITY™ 365 SERIES

MODEL	NOMINAL STEADY-STATE UV-A (365 nm) INTENSITY at 15 in (38 cm) ①	VISIBLE LIGHT MEASUREMENT	UV-A COVERAGE DIAMETER at 15 in (38 cm) at minimum 1,000 µW/cm²
<b>HIGH INTENSITY MODELS</b>			
SPN-CLR365-HC (Lithium-Ion Battery)	6,500 µW/cm²	< 1 foot-candle (11 lux)	3 in (7.62 cm)
SPN-CLR-BHA (Alkaline Battery)			
<b>STANDARD INTENSITY MODELS</b>			
SPN-CLR365-SC (Lithium-Ion Battery)	4,500 µW/cm²	< 1 foot-candle (11 lux)	4 in (10.1 cm)
SPN-CLR-BA (Alkaline Battery)			



<b>Light Source:</b>	(1) UV-A LED	(1) UV-A LED
<b>Lamp Style:</b>	Cordless Flashlight	Cordless Flashlight
<b>Lamp Head Diameter:</b>	1 in (2.6 cm)	1.75 in (4.5 cm)
<b>Length:</b>	7 in (17.8 cm)	8.75 in (22.2 cm)
<b>Weight:</b>	0.8 lbs (363 g) (with Battery)	1.2 lbs (544.3 g)
<b>Power Requirements:</b>	Lithium-Ion Rechargeable Battery	Alkaline Battery (3 C-Cells)
<b>Run Time:</b>	9 hours (continuous)	9 hours (continuous)
<b>Charge Time:</b>	6 Hours	N/A

① UV-A intensity reading taken with the Spectroline® AccuMAX™ Series meter, and is factory set to the value shown.


## UV-A Beam Profile

### HIGH INTENSITY MODELS

#### SPN-CLR365-HC & SPN-CLR-BHA MODELS

Surface Contour Profile at 15 in (38 cm)

Top Intensity Profile at 15 in (38 cm)

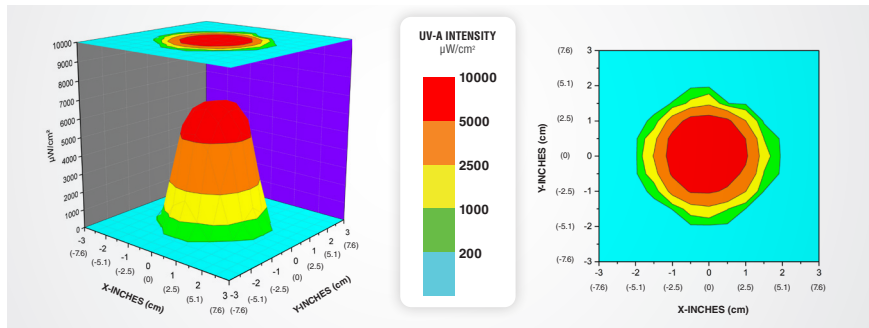


### STANDARD INTENSITY MODELS

#### SPN-CLR365-SC & SPN-CLR-BA MODELS

Surface Contour Profile at 15 in (38 cm)

Top Intensity Profile at 15 in (38 cm)

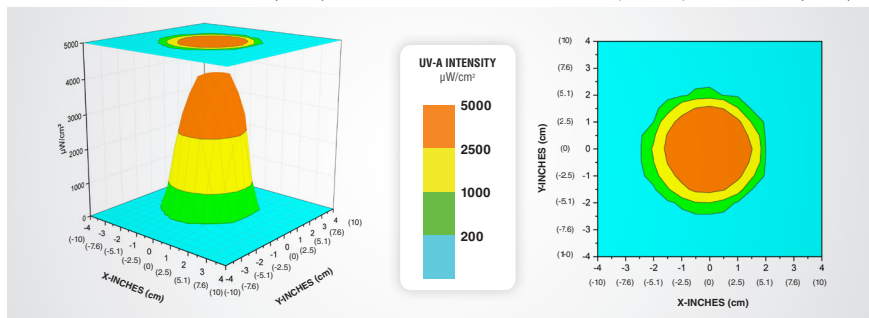

## CLARITY™ 365 KIT:

### SPN-CLR365-HC & SPN-CLR365-SC

#### Lithium-Ion Kit Includes:


Flashlight with battery, induction charging dock, AC power cord, USB power cord, belt holster, UV-absorbing spectacles, comes in carrying case.



### SPN-CLR-BHA & SPN-CLR-BA

#### Alkaline Kit Includes:

Flashlight with 3 C-Cell alkaline batteries, belt holster, UV-absorbing spectacles and carrying case.

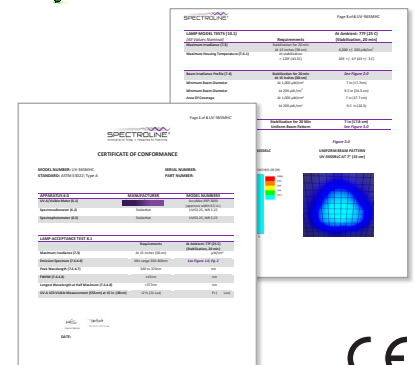

www.Spectro-UV.com

4 Dubon Ct., Farmingdale, NY 11735  
866-230-7305

DISTRIBUTED BY:



NDT  
11/20 A19175-4  
PRINTED IN USA